AIMARZ

AF01

Foldable Keyboard with Touchpad

Quick Start Guide

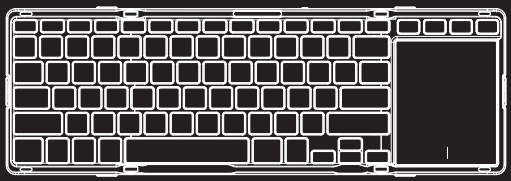

Reliable Work, On the Go.

Product Overview

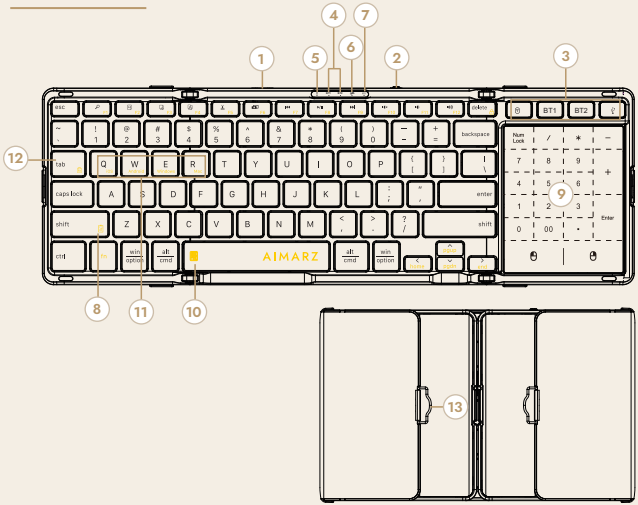

1. Type-C Port
2. On/Off Switch
3. Connection Mode Key
4. Bluetooth Status Light
5. 2.4G Status Light
6. Wired Mode / Caps Lock Indicator
7. Battery Status Light
8. Battery Check Key
9. Touchpad / Numeric Keypad
10. Touchpad / Numeric Keypad Switch [fn + Space]
11. System Switch [fn + Q / W / E / R]
12. Shortcut Function Switch [fn + tab]
13. Latch

The touchpad supports basic navigation, scrolling, and light office work.

In the Box

Please confirm the following items before first use:

- AF01 Keyboard
- 2.4G USB Receiver
- Leather Stand
- Keyboard Feet
- Charging Cable
- Type-C Adapter
- Leather Pouch

If any item is missing or damaged, contact online store customer support or visit www.aimarz.com.

Product Specifications

Item	Specification
Model	**AF01**
Product Name	**Foldable Keyboard with Touchpad and Numeric Keypad**
Bluetooth Device Name	**Aimarz Keyboard**
Connection Modes	**Bluetooth / 2.4G / Wired**
Bluetooth Channels	**BT1 / BT2**
Compatible Systems	**Windows / macOS / iOS / Android**
Battery Capacity	**180 mAh**
Charging Port	**Type-C**
Unfolded Size	**362.8 x 122.9 x 10 mm**
Folded Size	**199.2 x 122.9 x 20.5 mm**
Keyboard Weight	**384 g**

Before First Use

1. Charge the keyboard before first use.
2. Place the keyboard on a flat surface.
3. Fully unfold the keyboard.
4. Make sure the left and right latches are locked in place.
5. Turn on the keyboard.
6. Select a connection mode.

BT mode connection: see Page 06.

2.4G mode connection: see Page 07.

Wired mode connection: see Page 08.

Bluetooth Pairing

BT1 **BT2**

1. Turn on the keyboard.
2. Short press the BT1 or BT2 button to select a Bluetooth channel.
3. Press and hold the selected Bluetooth channel button for 3 seconds to enter pairing mode.
4. When the Bluetooth status light starts blinking rapidly, open Bluetooth settings on your device.
5. Select Aimarz Keyboard from the device list.
6. If a pairing code appears, enter the code on the keyboard and press Enter.
7. Once paired, test typing and touchpad operation.

Device Name: Aimarz Keyboard

If Bluetooth pairing fails, remove Aimarz Keyboard from your device's Bluetooth list, then press and hold the BT1 or BT2 button again to pair.

2.4G Connection

2.4G **USB Receiver** **Type-C Adapter**

1. Turn on the keyboard.
2. Short press the 2.4G button to select the 2.4G channel.
3. Press and hold the 2.4G button for 3 seconds to enter pairing mode.
4. When the 2.4G status light starts blinking rapidly, plug the 2.4G USB receiver into a USB port on your device.
5. If your device only has a Type-C port, connect the Type-C adapter first.
6. After your device recognizes the keyboard, test typing and touchpad operation.

If 2.4G pairing fails, unplug the receiver, turn the keyboard off and on again, enter pairing mode again, plug the receiver back in, and complete the connection.

Wired Mode

Wired **Type-C cable**

1. Turn on the keyboard.
2. Short press the wired mode button to select wired mode.
3. Connect the keyboard to your device with the Type-C cable.
4. Once connected, test typing and touchpad operation.

If wired connection fails, confirm that wired mode is selected, then reconnect the Type-C cable.

Multi-Device Switching

1. Complete pairing for each device first.
2. When switching channels, wait about 2 seconds for the connection to update before typing.

Device	Connection	Action	Use
Device 1	BT1	Short press the BT1 button	Switch to Device 1
Device 2	BT2	Short press the BT2 button	Switch to Device 2
Device 3	2.4G	Short press the 2.4G button	Switch to Device 3
Device 4	Wired	Short press the wired mode button	Switch to Device 4

Touchpad Functions

Mode Switch:
[fn + Space]: switch between touchpad mode and numeric keypad mode.
When using touchpad functions, the following gestures are available by system:

Windows (Windows 10 or later)

One-finger tap - left click

Two-finger scroll
- mouse wheel

Three-finger tap - search

Three-finger swipe up
- task view

Three-finger swipe down
- show desktop

Pinch with two fingers
- zoom in / out

Two-finger tap - right click

Three-finger swipe right
- switch active window

Three-finger swipe left
- switch active window

Four-finger tap
- Win + A action center

Touchpad Functions

Android

One-finger tap - left click

One-finger move
- cursor movement

Two-finger scroll - mouse wheel

Two-finger tap
- right click

Touchpad Functions

Mac

One-finger tap - left click

Double tap and hold - drag

Two-finger vertical scroll

One-finger move
- cursor movement

Two-finger tap
- right click

Two-finger horizontal swipe

Tip: Touch gestures may change due to system updates and compatibility differences.

Touchpad Functions

iOS (13.4.1 or later)

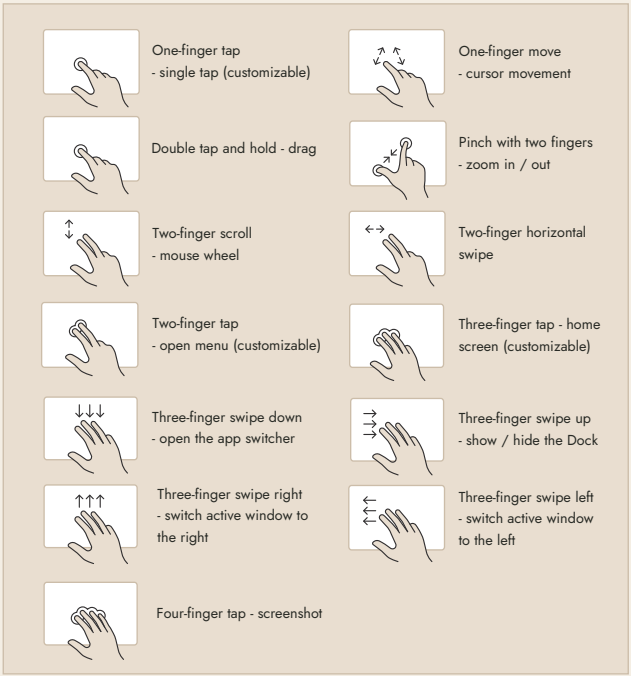

Custom Settings: Settings > Accessibility > Touch > AssistiveTouch > Devices, then select the keyboard pairing name.

You can customize one-finger tap, two-finger tap, and three-finger tap actions.

Function Keys

Press Fn + Tab to switch between shortcut functions and standard F1-F12 keys.

	Single Press	fn+F1-F12		Single Press	fn+F1-F12
Shortcut Key Mode	Search	F1	**F-Keys Mode**	F1	Search
	Select All	F2		F2	Select All
	Copy	F3		F3	Copy
	Paste	F4		F4	Paste
	Cut	F5		F5	Cut
	Screenshot	F6		F6	Screenshot
	Previous Track	F7		F7	Previous Track
	Play/Pause	F8		F8	Play/Pause
	Next Track	F9		F9	Next Track
	Mute	F10		F10	Mute
	Volume Down	F11		F11	Volume Down
	Volume Up	F12		F12	Volume Up

Note: Some functions may be unavailable due to system version and compatibility differences.

Charging and Sleep

Charging

Connect the keyboard to power with a Type-C cable. When charging, the red light stays on. When fully charged, the green light stays on.

Low Battery

When the red light flashes, charge the keyboard promptly.

Battery Check

[fn + Left Shift]: quickly check the keyboard battery level.

Flashes	1	2	3	4
Battery	0-25%	26-50%	51-75%	76-100%

Sleep Mode

The keyboard enters sleep mode after 30 minutes of inactivity. Press any key to wake it.

Safety Information

- Use the keyboard according to this guide.
- Keep away from water, liquids, and high humidity.
- Keep away from fire, heating devices, and high-temperature environments.
- Avoid dropping, crushing, bending, or disassembling the keyboard.
- Use the included or recommended charging cable.
- Turn off the keyboard before cleaning, and wipe it with a dry soft cloth.
- Keep small accessories such as the receiver and adapter out of reach of children.
- If the keyboard becomes hot, swollen, damaged, or abnormal, stop using it and contact online store customer support.
- Dispose of electronic products and batteries according to local regulations.

Connection Troubleshooting

Cannot find Aimarz Keyboard in the Bluetooth list

Make sure the keyboard is turned on and has power. Short press the BT1 or BT2 button to select a Bluetooth channel. Press and hold the selected channel button for 3 seconds. Search again when the status light starts blinking rapidly.

Bluetooth pairing fails

Remove Aimarz Keyboard from the device's Bluetooth list. Turn the keyboard off and on again. Press and hold the BT1 or BT2 button to enter pairing mode and reconnect.

2.4G connection fails

Unplug the receiver. Turn the keyboard off and on again. Enter 2.4G pairing mode again, then plug the receiver back in.

No input in wired mode

If wired connection fails, confirm that wired mode is selected. Reconnect the Type-C cable. Try another device port or cable.

Usage Troubleshooting

Connected but cannot type

Make sure AF01 is selected as the active input device. Short press the corresponding channel button to switch again. Disconnect the previous device and reconnect.

Touchpad behaves unexpectedly

Confirm that the keyboard is in touchpad mode. Confirm that the current system supports external touchpad gestures. Some gestures may vary by system version.

Multi-device switching delay

Wait about 2 seconds for the connection to update before typing.

Still unresolved

Contact online store customer support, or visit www.aimarz.com.

Support and Warranty

Support

For setup, connection, or product help, contact online store customer support or visit www.aimarz.com.

Warranty

This product includes a 12-month limited warranty.

When contacting support, please provide:

Order number, device model, operating system, connection mode, issue description, and available photos or videos.

AIMARZ

Reliable Work, On the Go.

www.aimarz.com