


AIMARZ

AF02


Split Foldable Keyboard

Quick Start Guide

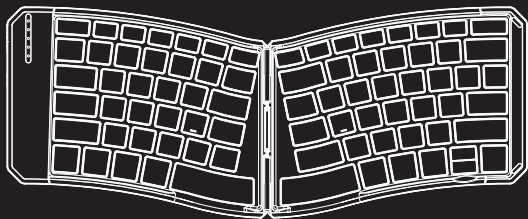

Reliable Work, On the Go.

Product Overview

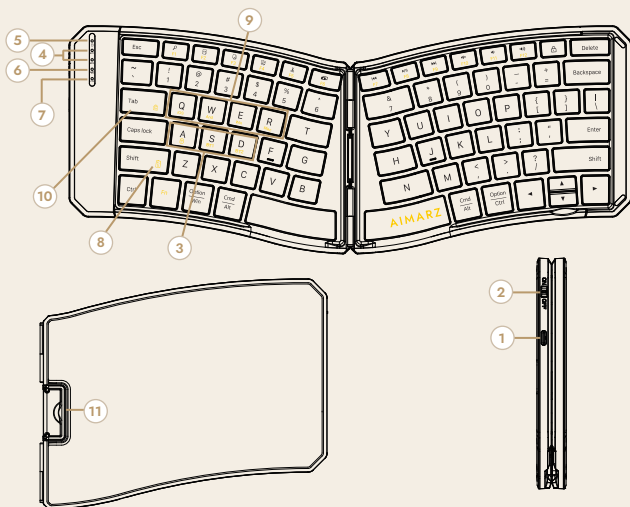

1. Type-C Charging Port
2. On/Off Switch
3. Connection Mode Key
4. Bluetooth Status Light
5. 2.4G Status Light
6. Caps Lock / Fn Lock Indicator
7. Charging / Low Battery Light
8. Battery Check [Fn + Left Shift]
9. System Switch [Fn + Q / W / E / R]
10. Shortcut Function Switch [Fn + Tab]
11. Latch

In the Box

Please confirm the following items before first use:

— AF02 Keyboard

— 2.4G USB Receiver

— Leather Stand

— Keyboard Feet

— Charging Cable

— Type-C Adapter

— Leather Pouch

If any item is missing or damaged, contact online store customer support or visit www.aimarz.com.

Product Specifications

Item	Specification
Model	AF02
Product Name	Split Foldable Keyboard
Bluetooth Device Name	Aimarz Keyboard
Connection Modes	Bluetooth / 2.4G
Bluetooth Channels	BT1 / BT2
Compatible Systems	Windows / macOS / iOS / Android
Battery Capacity	140 mAh
Charging Port	Type-C
Unfolded Size	357.2 x 144.8 x 9.3 mm
Folded Size	180.3 x 144.8 x 18.5 mm
Keyboard Weight	260 g

Before First Use

- 1 Charge the keyboard before first use.
- 2 Place the keyboard on a flat surface.
- 3 Fully unfold the keyboard.
- 4 Make sure the latch is locked in place.
- 5 Turn on the keyboard.
- 6 Select a connection mode.

Bluetooth connection: see Page 06.

2.4G connection: see Page 07.

Bluetooth Pairing

BT1

BT2

- 1 Turn on the keyboard.
- 2 Short press BT1 or BT2 to select a Bluetooth channel.
- 3 Press and hold the selected Bluetooth channel key for 3 seconds to enter pairing mode.
- 4 When the Bluetooth status light starts blinking rapidly, open Bluetooth settings on your device.
- 5 Select "Aimarz Keyboard" from the device list.
- 6 If a pairing code appears, enter the code on the keyboard and press Enter.
- 7 Once connected, test typing.

Device Name: Aimarz Keyboard

If pairing fails, remove "Aimarz Keyboard" from the Bluetooth list, then press and hold BT1 or BT2 again to pair.

2.4G Connection

2.4G

USB Receiver

Type-C Adapter

- 1 Turn on the keyboard.
- 2 Short press the 2.4G channel key to select the 2.4G channel.
- 3 Press and hold the 2.4G channel key for 3 seconds to enter pairing mode.
- 4 When the 2.4G status light starts blinking rapidly, plug the 2.4G USB receiver into a USB port on your device.
- 5 If your device only has a Type-C port, connect the Type-C adapter first.
- 6 After your device recognizes the keyboard, test typing.

If pairing fails, unplug the receiver, turn the keyboard off and on again, enter pairing mode again, and plug the receiver back in.

Multi-Device Switching

1. Complete pairing for each device first.
2. When switching channels, wait about 2 seconds for the connection to update before typing.

Device	Connection	Action	Use
Device 1	BT1	Short press the BT1 button	Switch to Device 1
Device 2	BT2	Short press the BT2 button	Switch to Device 2
Device 3	2.4G	Short press the 2.4G button	Switch to Device 3

Function Keys

Press **Fn + Tab** to switch between shortcut functions and standard F1-F12 keys.

Shortcut Key Mode	Single Press	fn+F1-F12	F- Keys Mode	Single Press	fn+F1-F12
	Search	F1		F1	Search
	Select All	F2		F2	Select All
	Copy	F3		F3	Copy
	Paste	F4		F4	Paste
	Cut	F5		F5	Cut
	Screenshot	F6		F6	Screenshot
	Previous Track	F7		F7	Previous Track
	Play/Pause	F8		F8	Play/Pause
	Next Track	F9		F9	Next Track
	Mute	F10		F10	Mute
	Volume Down	F11		F11	Volume Down
	Volume Up	F12		F12	Volume Up

Note: Some functions may be unavailable due to system version and compatibility differences.

Charging and Sleep

Charging

Connect the keyboard to power with the Type-C cable. The green light stays on while charging and turns off when charging is complete.

Low Battery

When the red light flashes, charge the keyboard promptly.

Battery Check

[Fn + Left Shift]: quickly check the keyboard battery level.

Flashes	1	2	3	4
Battery	0-25%	26-50%	51-75%	76-100%

Sleep Mode

The keyboard enters sleep mode after 10 minutes of inactivity. Press any key to wake it.

Safety Information

- Use the keyboard according to this guide.
- Keep away from water, liquids, and high humidity.
- Keep away from fire, heating devices, and high-temperature environments.
- Avoid dropping, crushing, bending, or disassembling the keyboard.
- Use the included or recommended charging cable.
- Turn off the keyboard before cleaning, and wipe it with a dry soft cloth.
- Keep small accessories such as the receiver and adapter out of reach of children.
- If the keyboard becomes hot, swollen, damaged, or abnormal, stop using it and contact online store customer support.
- Dispose of electronic products and batteries according to local regulations.

Connection Troubleshooting

Cannot find Aimarz Keyboard in the Bluetooth list

Make sure the keyboard is turned on and has power. Short press the BT1 or BT2 button to select a Bluetooth channel. Press and hold the selected channel button for 3 seconds. Search again when the status light starts blinking rapidly.

Bluetooth pairing fails

Remove Aimarz Keyboard from the device's Bluetooth list. Turn the keyboard off and on again. Press and hold the BT1 or BT2 button to enter pairing mode and reconnect.

2.4G connection fails

Unplug the receiver. Turn the keyboard off and on again. Enter 2.4G pairing mode again, then plug the receiver back in.

Bluetooth / 2.4G input check

If the keyboard cannot type, confirm the current connection mode. For Bluetooth, disconnect and reconnect in the Bluetooth list. For 2.4G, unplug and reconnect the receiver.

Usage Troubleshooting

Connected but cannot type

Make sure AF02 is selected as the active input device. Short press the corresponding channel button to switch again. Disconnect the previous device and reconnect.

Input lag or no response

Make sure the keyboard has enough battery and the current device has switched to AF02. Reconnect Bluetooth, or unplug and reconnect the 2.4G receiver.

Multi-device switching delay

Wait about 2 seconds for the connection to update before typing.

Still need help

Contact online store customer support, or visit www.aimarz.com.

Support and Warranty

Support

For setup, connection, or product help, contact online store customer support or visit www.aimarz.com.

Warranty

This product includes a 12-month limited warranty.

When contacting support, please provide:

Order number, device model, operating system, connection mode, issue description, and available photos or videos.

AIMARZ

Reliable Work, On the Go.

www.aimarz.com